



# IP68 Waterproof Connector

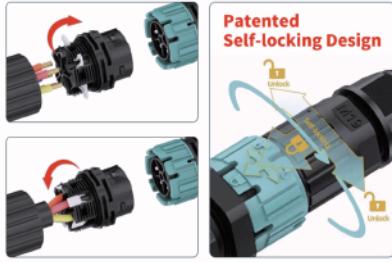

**Screw Free**

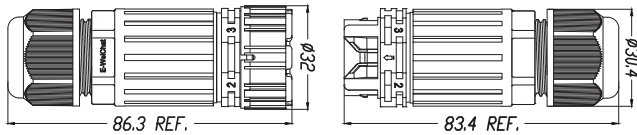

## Options

Number of Poles	4Pin	5Pin	
Seal ring			
Cable range	5~9mm	9~12mm	10~14mm
Stripping length	10~13 mm		

## EW-P25MF-XP

Male & Female Self-locking Screwless Fast Wiring Connector  
(X can be 4/5, denoting the number of poles)

Wiring Method:

Screwless fast wiring

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: V0

Rated Voltage: 450V

Rated Current: 16A

Wire Section: 0.5~2.5mm<sup>2</sup>

Outer Cable Diameter: 5-9mm, 9-12mm, 10-14mm

Pluggable Life: 1,500 times

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

## Packaging

Export Carton (L\*W\*H): 42\*30\*34cm

Quantity: 25pcs / PE PACK (Male & Female packed separately)

200 sets / CTN

Gross Weight: EW-P25MF-4P --- 14.5KGs

EW-P25MF-5P --- 14.9KGs



## Installation Illustration

